


English

VIDEO DOOR PHONE DOOR STATION

MR7D USER MANUAL

- ALUMINUM PANEL
- DIRECT SELECT CALL
- LED NIGHT VIEW
- NAMEPLATE FOR EACH HOUSE
- RAINCOVER AVAILABLE

1. PARTS AND FUNCTIONS

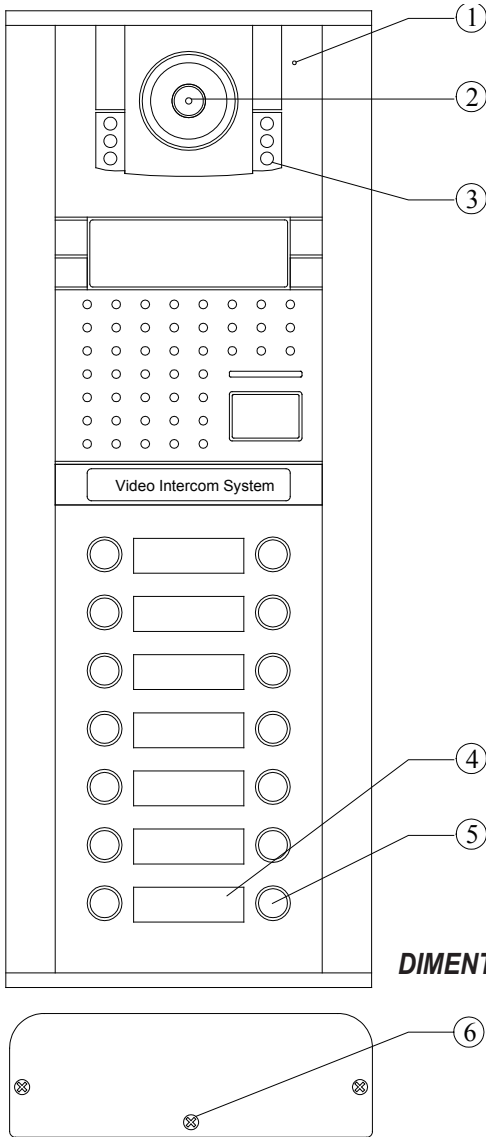


1. Microphone
2. Camera
3. Night view LED
4. Nameplate
5. Call button
6. Backcover screw

DIMENSIONS: 336(H)×125(W)×50(D)mm

Note: The mode you bought may have different number of buttons, the installations are the same


2. PORTS INSTRUCTIONS

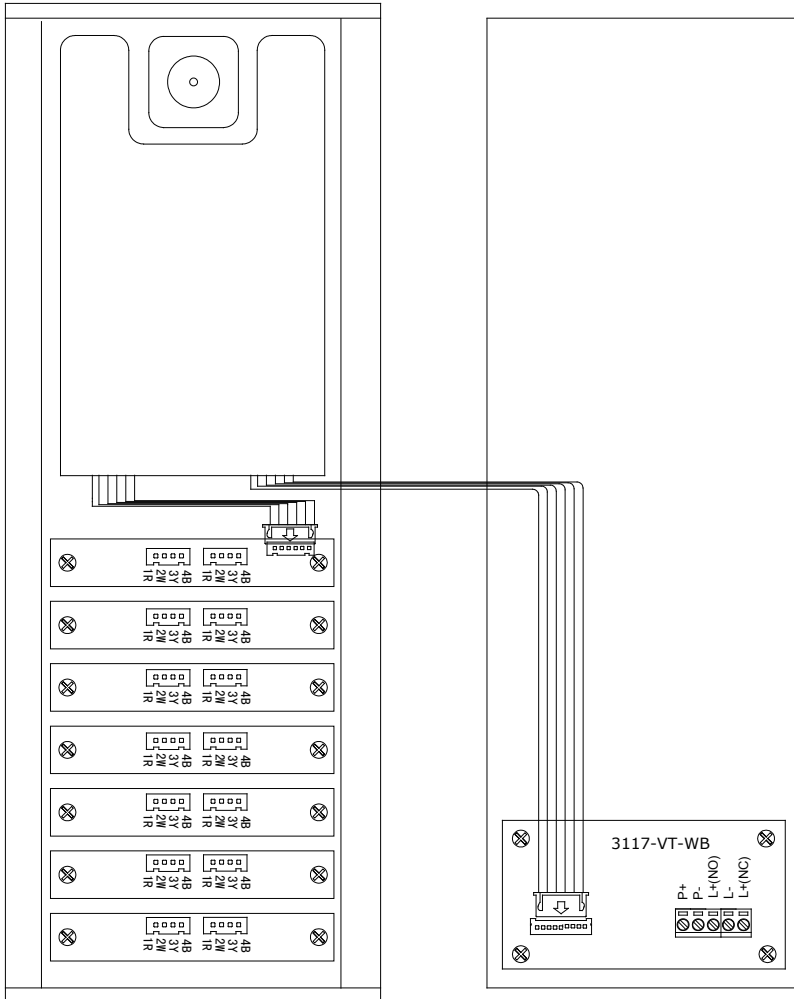


Port Instructions:

- P+,P-: power input, connect to the P+,P- of the power supply(the output of the power supply must be 18V DC)
- L+(NO),L-,L+(NC): e-lock connection port.(refer to wiring next page)
- 1R,2W,3Y,4B: connect to the 1R,2W,3Y,4B of the Indoor monitors

3. STANDARD SYSTEM WIRING

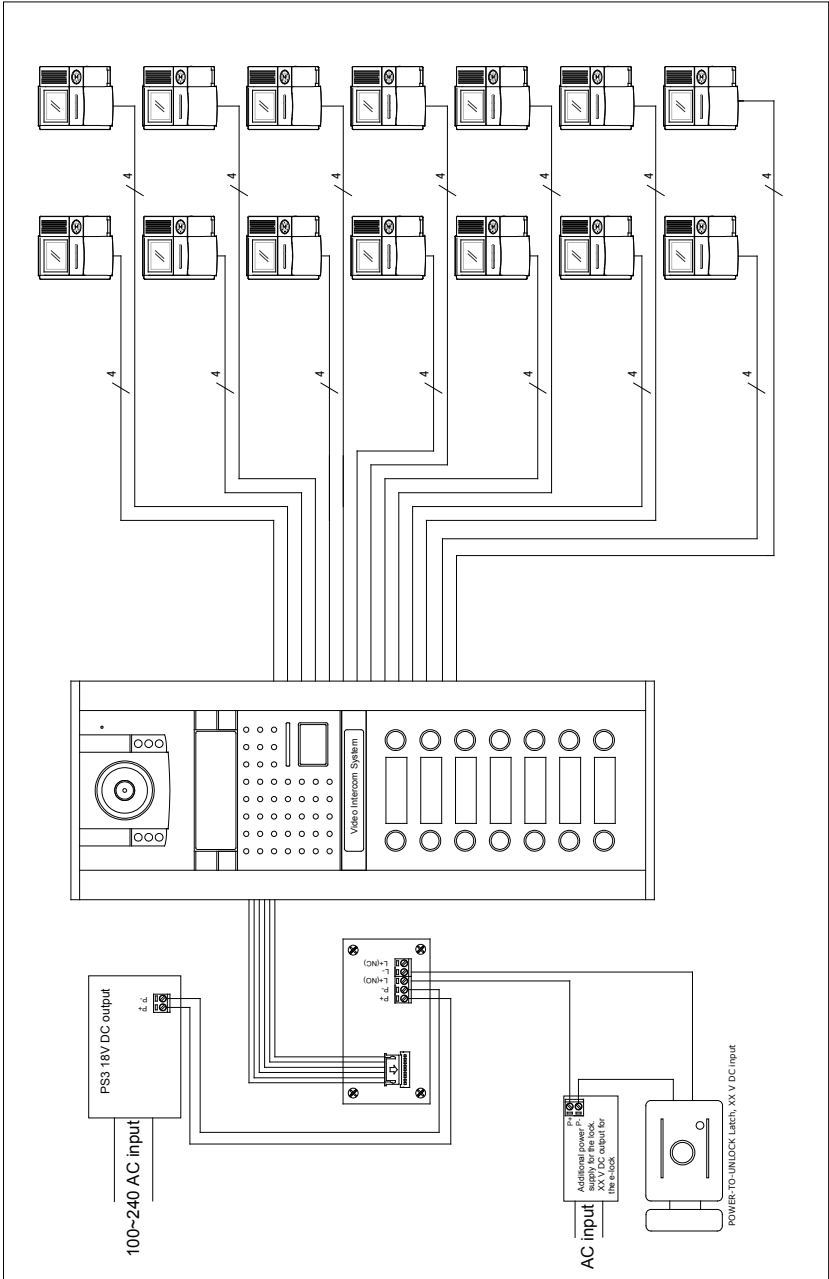

4. NAMEPLATE INSTRUCTIONS

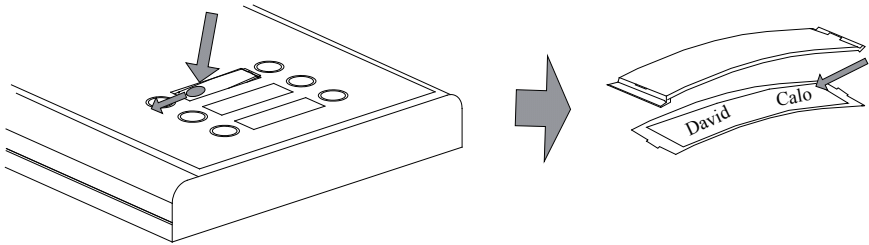

- Down press the left side of the nameplate and push to left, then the right side of the nameplate will jump up
- Take the nameplate out and put the paper with the names in between the two pieces of the nameplate, then put them back into the door station

5. SPECIFICATIONS

- Power supply: DC 18V
- Power consumption: Standby 0.5W; Working status 15W
- Camera Lens: 3.6mm, 72 degree visual angle
- Camera resolutions: >300 TV lines
- Video signal: 1Vp-p, 75Ω, CCIR standard
- Monitor time: 30 seconds
- alking time: 90 seconds
- Connection mode: 4 wiring, polar
- Dimensions: 336(W)×125(H)×50(D)mm

6. PRECAUTIONS

- All parts should be protected from violence vibration or dropping.
- Please do the cleanness with soft cotton cloth, please do not use the organic or chemical clean impregnate.
- Image distortion may occur if the Door station is mounted too close to magnetic field e. g. Microwaves, etc.
- Please keep the Door station away from wet, high temperature, dust, and caustic and oxidation gas in order to avoid any unpredictable damage

